

## RIS3216 series

**16-port full Gigabit industrial-grade DIN-rail unmanaged Ethernet switch**

### Product Features

- Supports 16 Gigabit electrical interface configuration;
- Gigabit electrical port 10/100/1000M adaptive, full/half duplex, MDI/MDIX adaptive mode;
- The power supply supports overload protection, reverse connection protection and redundancy protection (LV);
- Plug and play, convenient and fast;
- IP40 protection level, fanless cooling ;
- Adopting industrial-grade power supply design, a variety of power input solutions are available to meet users' flexible applications;
- -40°C~75°C operating temperature, meeting industrial application scenarios .
- Default rail, optional wall mounting;

### Switch Parameters





Network Interface	
Port description	16 Gigabit electrical ports
power supply	
power input	Low-voltage DC power supply: dual power supply redundancy, range DC12 ~48V
Power consumption	
Protect	Support overload protection, reverse connection protection and redundancy protection (LV)
technology	
Ethernet specifications	IEEE 802.3: 10Base-T IEEE 802.3u: 100Base-TX IEEE 802.3ab: 1000Base-T
MAC address table	8k
priority queue	8
jumbo frame	10240 bytes
Processing method	store and forward
Switch Features	Exchange delay time : <10μs Switch backplane bandwidth : 56Gbps
Mechanical properties	
Dimensions (W x H x D ) mm	42.5 x 161 x 12
shell	Metal
Heat dissipation method	Fanless design, natural heat dissipation
Protection level	IP40
Installation method	Default rail, optional wall mounting
Weight (g)	≤3KG
environment	
storage temperature	-40~85 °C
Operating temperature	-40~75 °C
Working humidity	5%~95% no condensation
Certification	
EMI	FCC Part 15, CISPR (EN55022) class A
EMS	EN61000-4-2 (ESD) EN61000-4-3 (RS) Contact discharge 6 kV, air discharge 8 Kv 10V/m, 80MHz~1GHz EN61000-4-4 (EFT) EN61000-4-5 Signal terminal 1 kV, power input terminal 2 kV Power input: 2kV (line/ground), 1kV (line/line) (Surge) 10V, 150kHz~80MHz EN61000-4-6 (CS)
impact	IEC60068-2-27
fall	IEC60068-2-32
shock	IEC60068-2-6
Security Level	EN 62368-1 (LVD)



Warranty

5 years

## Switch Size

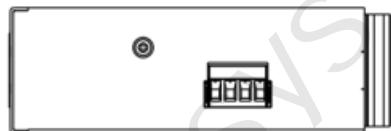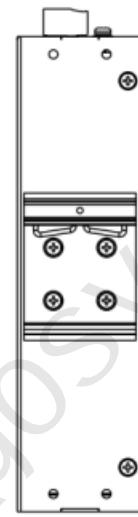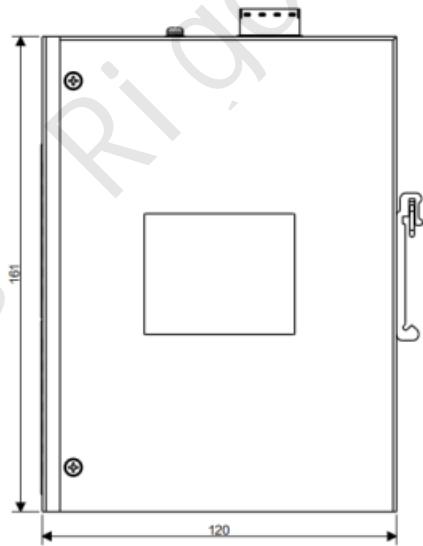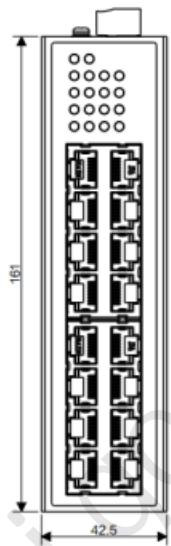

## Product Model

Model	Description
RIS3216-16GT - LV	Industrial grade unmanaged full Gigabit switch, 16 Gigabit electrical ports, dual DC12~DC48V power supply